


ElastoTherm™

Nail Base

Nailable Roof Insulation

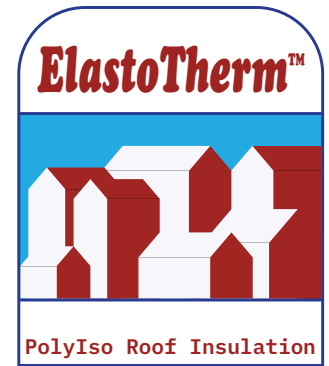

Product Information:

ElastoTherm Nail Base is a closed cell ElastoTherm B or ElastoTherm E polyisocyanurate thermal insulation panel bonded to a min 7/16" APA/TECO rated or OSB or min 19/32" CDX plywood.

- Combines the benefits of a nailable roof substrate with polyiso insulation.
- Manufactured using a CFC-free, HCFC-free, and HFC-free foam blowing technology that has zero ozone depletion potential (ODP) and virtually no global warming potential.
- Available in both Grade 2 (20 psi) and grade 3 (25 psi) compressive strengths tested per ASTM C 1289.

Approvals:

- UL 1256 Insulated Metal Deck Constructions No. 120, 123, & 292
- UL 790 Roofing Systems Classification
- UL 263 Fire Resistance Classification
- UL 1897 Uplift Resistance
- FM 4450/4470 (refer to RoofNav for specific details)
- Florida Approved (FL17989)
- Miami-Dade Approved



Flat Panels:

- Sizes:
 - 4 ft X 8 ft
 - Thickness: 1.5 to 4.5 inches
- Refer to table 1 for flute spans and R value information



ElastoTherm Nail Base

Table 1 - Thermal Data

Thickness		LTTR Value	RSI	Flute Spanability	
in	mm			in	mm
1.5	38.1	8.6	1.50	4.375	111.13
2.0	50.8	11.4	2.01	4.375	111.13
2.5	63.5	14.4	2.53	4.375	111.13
3.0	76.2	17.4	3.06	4.375	111.13
3.5	88.9	20.5	3.60	4.375	111.13
4.0	101.6	23.6	4.15	4.375	111.13
4.5	114.3	24.2	4.25	4.375	111.13

Storage:

- Store panels flat and in a horizontal position to prevent damage.
- Store elevated (at least 3 inches) and covered to protect from environmental damage.
- Do not use wet or damaged panels.
- Refer to PIMA Tech Bulletin No. 109 for additional guidelines.

Installation:

- Bitec requires the the use of Bitec **ImperFast** fasteners to approved roof decks.
- Panels must be kept dry from storage through installation. Install only as much as can be covered with roofing that day.
- When using multiple layers of insulation, joints should be staggered a minimum of 6 inches to prevent thermal bridging.

Physical Properties

Property	Result	ASTM Test
Compressive Strength, psi	20 (grade 2)	D1621
Dimensional Stability, %	<2	D2126
Water Absorbtion, %	<1.0	C209
Vapor Transmission, perm	<1.0	E96
Flame Spread	<75	E84
Smoke Developed	<450	E84
Density, pcf	2.0	D1622